

Dimensions


| CODE | Min cabinet size | Min door width | Diameter | Height | |
|----------------|------------------|-------------------|----------|---------|--|
| VKS.C180.800.C | 800 | 450 | 745 | 560-790 | |

Component list


| Illustration | Name | Qty | Illustration | Name | Qty | Illustration | Name | Qty |
|--------------|------------|-----|--------------|--------------------|-----|--------------|--------------------|-----|
| | Basket | 2 | | Long tube | 1 | | Bearing support | 2 |
| | Short tube | 1 | 0 | Positioning device | 1 | | Bolt | 2 |
| | | | | | | | Screw | 13 |

Instructions


1. Screw the long tube into the cabinet base with the tube centre positioned as per the dimensions below.



2. Insert the first pin into the long tube to fix the bottom bearing supports. Slide on the bottom basket. Repeat for the top basket.

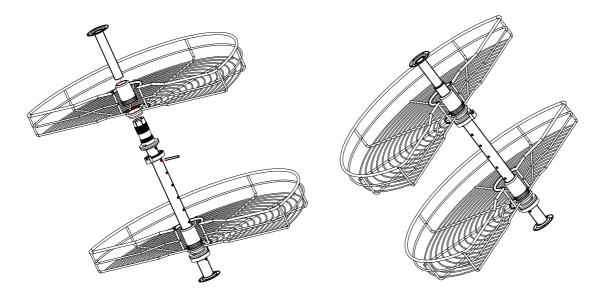

3. Slide the short tube into the long tube and attach to the top of the cabinet.

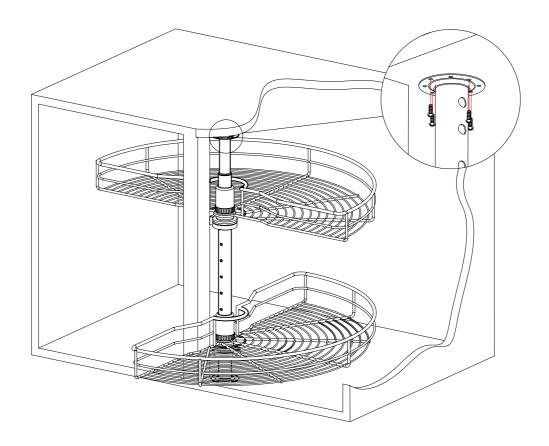

4. To automatically pull out the bottom basket when opening the cabinet door, attach the positioning device to the cabinet door as per below.

